



BEZ-440 Drilling/Cutting Diagram and Template

To mount a Seetron BPP-440L display, drill 1/8" mounting holes at the outer corners and cut out the shaded area. (Note that the display is symmetrical; offsets shown for the left and bottom are the same for right and top.) Countersink the mounting holes so that the machine-screw heads set flush. Finally, peel and stick the faceplate, making sure that it is centered and straight relative to the screen.

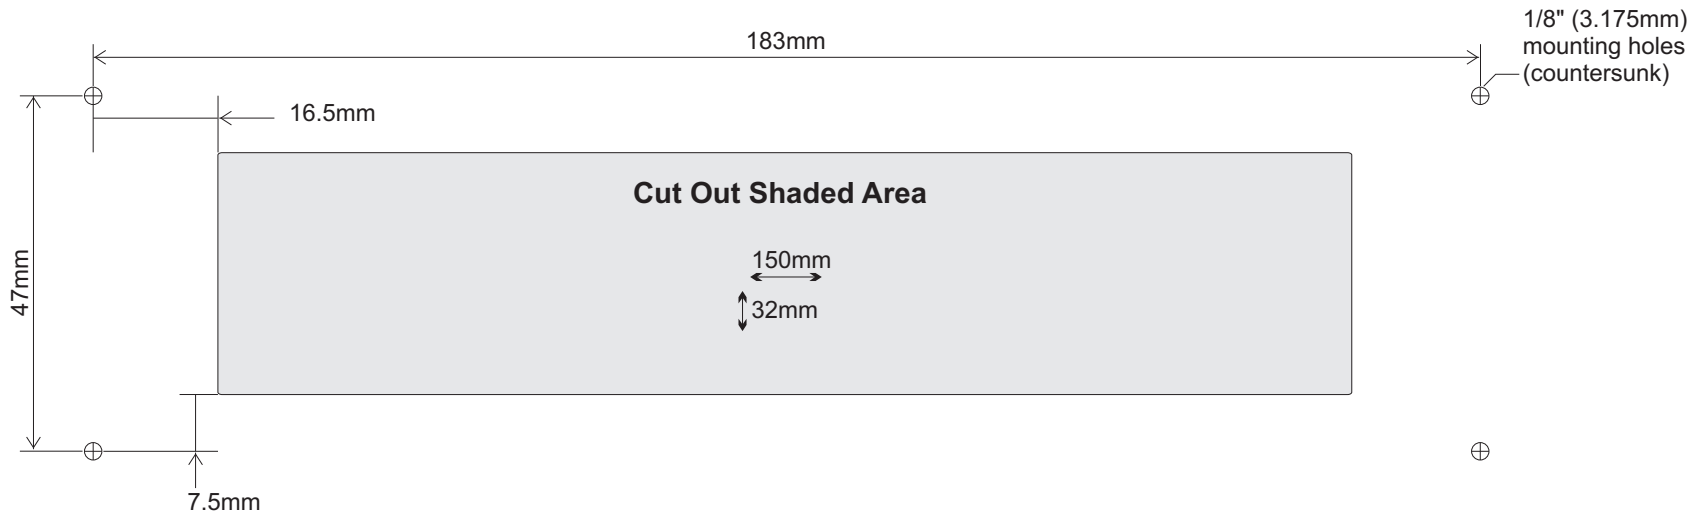

You may use this drawing as a template: Tape it over the mounting location and drill/cut directly through the paper. If you use this method, make sure to **measure the printed drawing** carefully and adjust printer settings if needed to ensure that the drawing is printed exactly to the correct dimensions both horizontally and vertically.

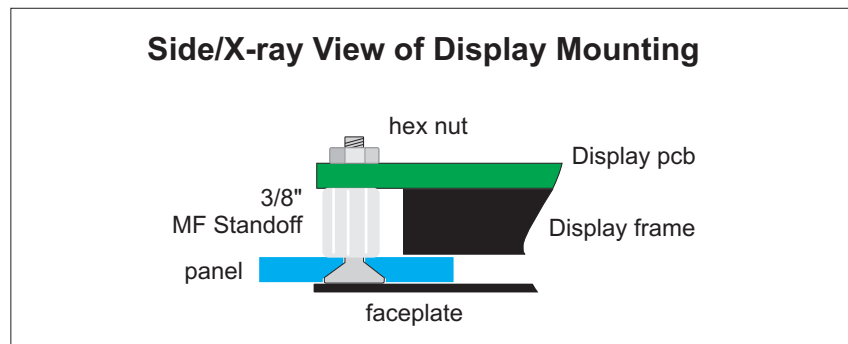

IMPORTANT: The standoffs are sized to ensure a small gap between the display frame and the mounting panel. Make sure that nothing fills this gap and presses on the display frame. **Pressure on the frame can damage the display.**